


Versatile™ 4C Mailbox, 4C09S-02

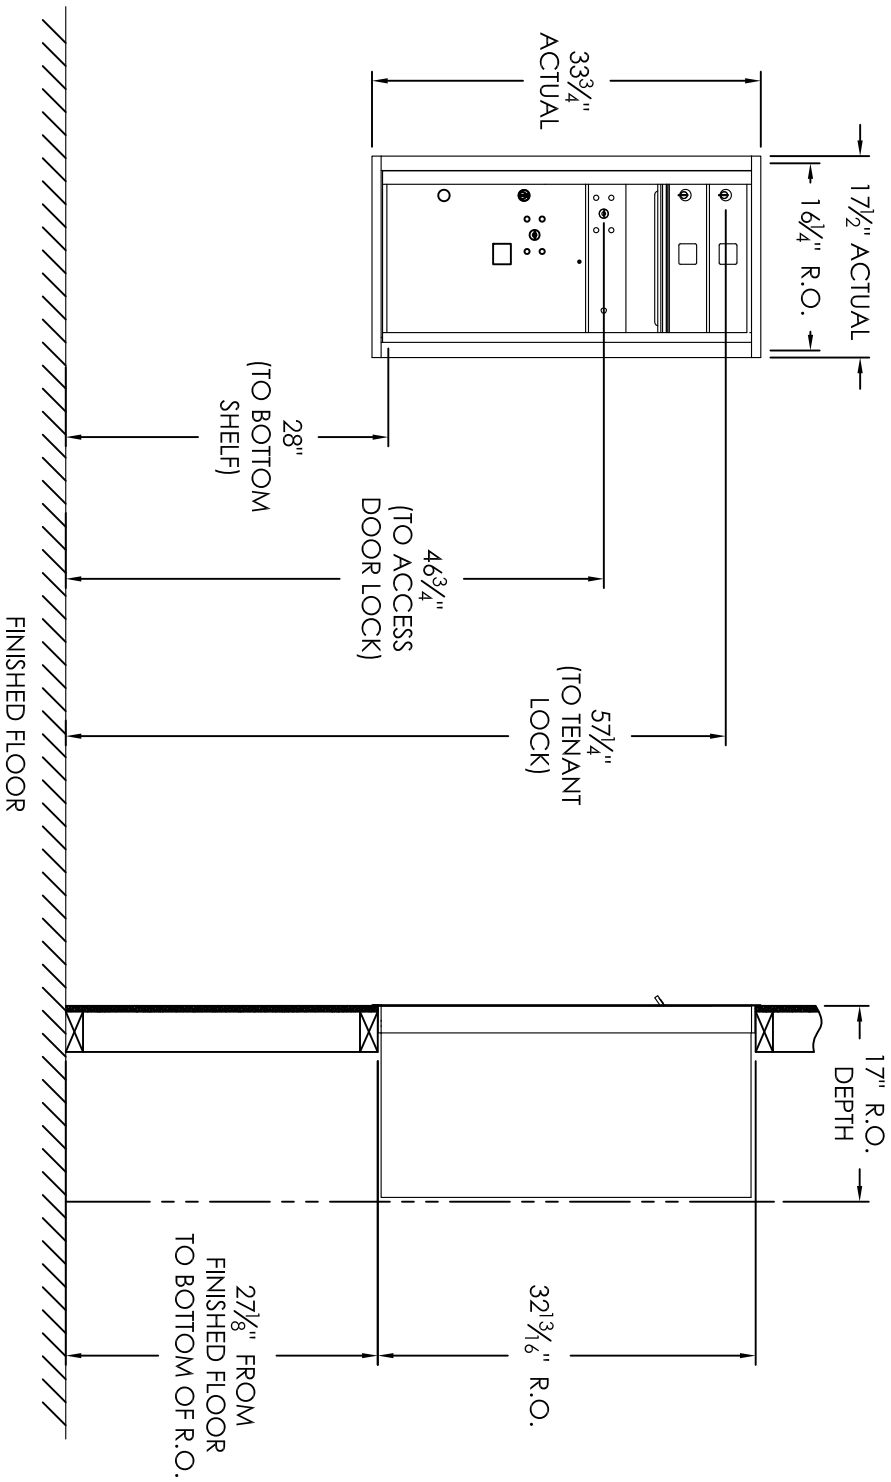

COMPARTMENT CHART

| DESCRIPTION | COMPARTMENT | COMPARTMENT SIZE | QTY. |
|---------------|-------------|--------------------------|------|
| MAILBOX | MB1 | 3" H x 12" W x 15" D | 2 |
| OUTGOING MAIL | OM2 | 6-1/2" H x 12" W x 15" D | 1 |
| PARCEL | PLS | 17" H x 12" W x 15" D | 1 |

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MAILBOX

the Mailbox Works

1743 Quincy Ave., Suite 151

Naperville, IL 60540

800-824-9985

www.MailboxWorks.com

| MODEL | REV | REV |
|----------------|----------|---------------|
| 4C09S-02 | D | |
| SCALE | NONE | LAST REV DATE |
| | | 5/15/14 |
| DRAWING NUMBER | DRAWN BY | |
| 4C09S-02CS | RS | |

Notes:

- This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
 - No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - No patron (tenant) lock shall be positioned more than 67" AFF.
 - No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - The USPS Arrow lock shall be positioned 36"-48" AFF.
- This 4C mailbox can also be used for private applications.
- The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) - 1/8".